



Hellan Strainers are available with screens manufactured from either perforated metal or wedge-wire materials. Information for standard perforated metal screen options and wedge-wire screen options are illustrated below.


**STANDARD PERFORATED METAL SCREEN OPTIONS**




**1/32" Staggered**  
(0.965 mm)  
16% open




**1/16" Staggered**  
(1.588mm)  
24% open




**3/32" Staggered**  
(2.381mm)  
33% open



**1/8" Staggered**  
(3.175mm)  
40% open




**3/16" Staggered**  
(4.763mm)  
51% open



**1/4" Staggered**  
(6.350mm)  
58% open

**Note:** Other perforated screen sizes are available on special order. Please contact the factory for more information. Open area percentage shown for 1/16" & 1/32" above are for double wrap over 1/4".

**STANDARD WEDGE-WIRE SCREEN OPTIONS**

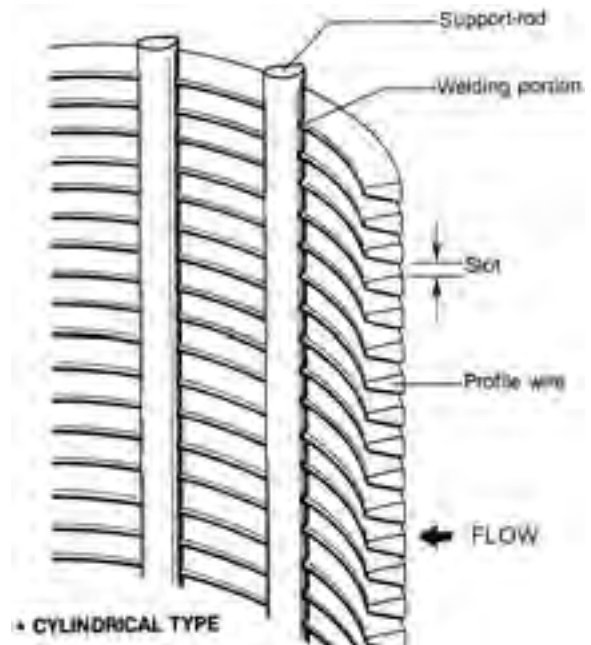

**Note:** Other wedge-wire slot width sizes are available on special order. Please contact the factory for more information.

Wedge-wire slots can be made to order. Standard slots are listed below:

.015	27% open
.009	18% open
.007	15% open
.005	11% open*
.004	9% open*

\*Consult factory